


DATA SHEET

COMPOSITE INSULATED PANELS



PRH 45/250

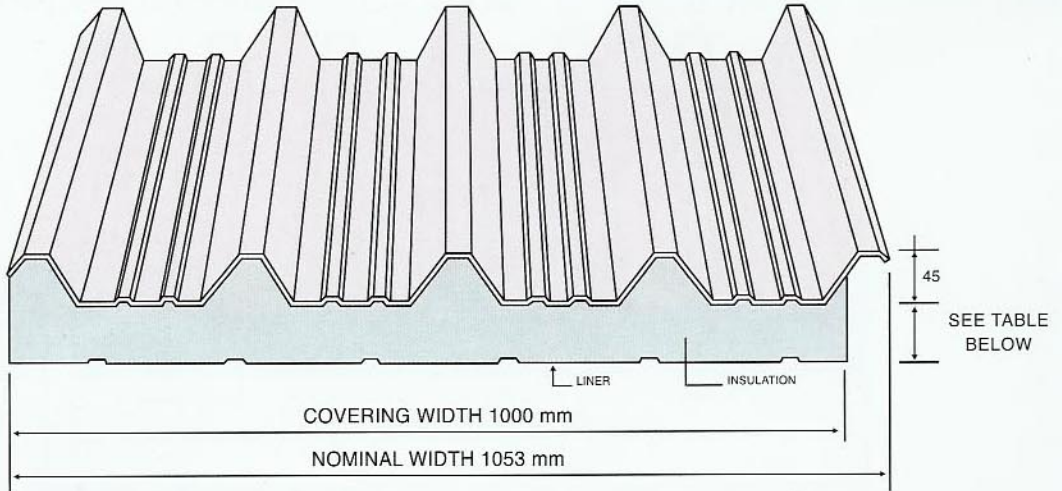

Composite panels are produced using rigid polyurethane with external and internal sheets in steel or aluminium of varying thickness, coatings and colours.

PU

Average Density : 35 Kg/M³

Thickness : 25 - 100 MM

“U’ Value

PU Thickness	W/M ² °C
--------------	---------------------

25 MM	0.76
-------	------

35 MM	0.54
-------	------

50 MM	0.38
-------	------

* See data sheet for single skin.

* Contact Profiles for information regarding coatings and colours.