


# DATA SHEET

# COMPOSITE INSULATED PANELS



## PRH 35/207

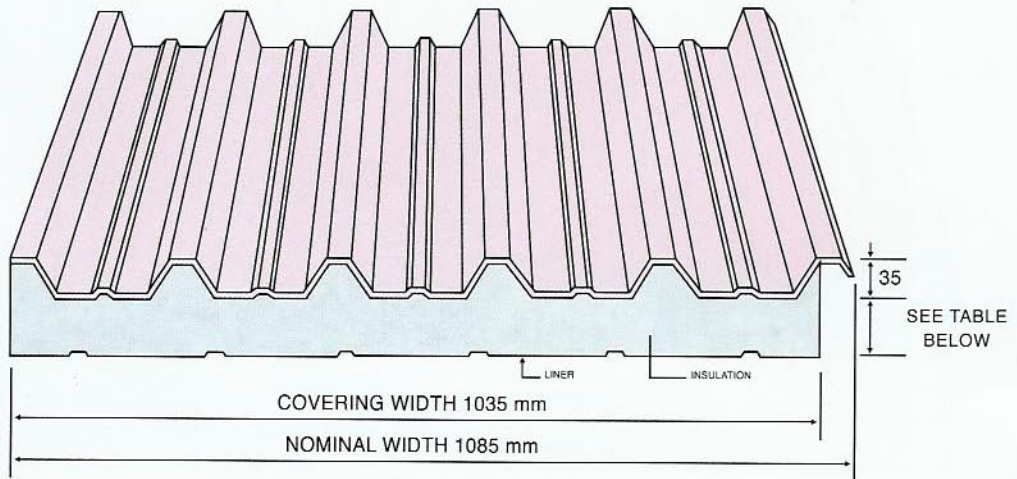

Composite panels are produced using rigid polyurethane with external and internal sheets in steel or aluminium of varying thickness, coatings and colours.

### PU

Average Density : 35 Kg/M3

Thickness : 25 - 100 MM

### “U’ Value

PU Thickness	W/M <sup>2</sup> °C
--------------	---------------------

25 MM	0.76
-------	------

35 MM	0.54
-------	------

50 MM	0.38
-------	------

- \* See data sheet for single skin.
- \* Contact Profiles for information regarding coatings and colours.