


DATA SHEET

ALUMINIUM RH 3" x 3/4"

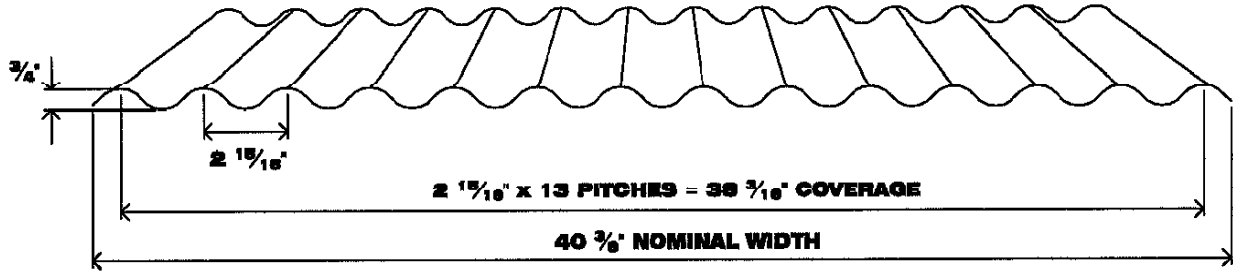

APPLICATIONS

ROOF AND WALL SHEETS

SPECIFICATIONS

REF. PROFILED ALUMINIUM PANELS SPEC. SHEET

N / M²

ALLOWABLE LOAD TABLE:

SPAN CONDITION		PURLINS CENTERS IN mm					M I			
		1000	1250	1500	1750	2000	mm 4/M	WEIGHT	ZxTOP	ZxBOTT.
mm								KG/M ²	mm ³ /M	mm ³ /M
0.50	△△	773	396	229	144	97	14386	1.717	1514	1514
	△△△	1211	634	367	231	155				
0.60	△△	928	475	275	173	116	17263	2.061	1817	1817
	△△△	1484	760	440	277	186				
0.70	△△	1083	554	321	202	135	20140	2.404	2120	2120
	△△△	1696	887	513	323	217				
0.80	△△	1237	634	367	231	155	23017	2.747	2422	2422
	△△△	1938	1014	587	369	247				
0.90	△△	1392	713	412	260	174	25895	3.091	2725	2725
	△△△	2181	1140	660	416	278				
1.00	△△	1547	792	458	289	193	28772	3.434	3028	3028
	△△△	2423	1267	733	462	309				
1.20	△△	1856	950	550	346	232	34526	4.121	3634	3634
	△△△	2907	1521	880	554	371				

Working load in N/m² and deflection L/100

Profiles R Factory LLC can produce in any length upto 3.8 M x 40 3/8" width.

PROFILES R Factory LLC.

P.O.BOX 656, SHARJAH - UNITED ARAB EMIRATES

TEL:- (9716) 534 22 22 - FAX:- (9716) 534 20 00

